


??

ERICSSON-LG iPECS SBG-1000

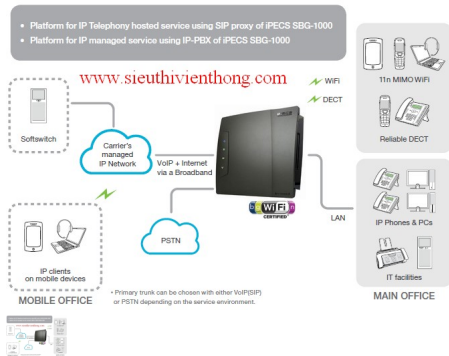

Rating: Not Rated Yet

Price:

[Ask a question about this product](#)

Manufacturer: [LG-Ericsson](#)

Description

T?ng ?ài ?i?n tho?i ?a ch?c n?ng ERICSSON-LG iPECS SBG-1000

- Gi?i pháp hoàn h?o cho v?n phòng thông minh, phù h?p v?i v?n phòng kho?ng 24 ng??i dùng.

- Hi?n ??i, ??n gi?n, an toàn và linh ??ng.

- H? tr? t?i ?a các d?ch v?, ??m b?o t?t c? các nhu c?u trao ??i thông tin liên l?c v?i chi phí t?i thi?u cho các doanh nghi?p nh? và v?a.

- Ch?c n?ng: T?ng ?ài ?i?n tho?i Analog, t?ng ?ài IP, IP Softphone, Wireless LAN, PoE Switch, Router, Print Server, File Server, Firewall, VPN, ?i?n tho?i không dây DECT...

T?ng ?ài

Trang b? ???c 04 trung k? ?i?n tho?i th??ng PSTN, 6 trung k? IP chu?n SIP, 23 ?i?n tho?i IP, 01 ?i?n tho?i th??ng ho?c máy Fax, 06 ?i?n tho?i không dây DECT Phone.

Ch?c n?ng tr? l?i ?i?n tho?i t? ??ng 4 kênh (240 phút), Voice mail, ghi âm cu?c g?i ?i?n tho?i...

Ch?c n?ng IP Softphone và SIP Client cho Smart phone.

Switch

8-port 10/100Mbps. Port 1-4 có ch?c n?ng c?p ngu?n qua m?ng PoE (T?ng c?ng ngu?n 20W). Ch?c n?ng VLAN, Loop Detect...

Wireless LAN

Chu?n 802.11 b/g/n 2.4GHz.

WAN

1-port 10/100/1000 BASE-T.

Print Server, File Server

Chia s? s? d?ng máy in và file thông qua c?ng USB, qu?n lý ??a, backup và restore.

DECT

Tích h?p s?n DECT Base (thu phát sóng ?i?n tho?i không dây)

Firewall

Các chính sách b?o m?t, truy c?p t?ng quát, ng?n ch?n các trang Web, NAT, DMZ host...

Qu?n tr?

Qu?n tr? d?a trên n?n Web HTTP, HTTPS, Telnet CLI (Command Line Interface), qu?n lý ng??i dùng...

SPECIFICATIONS

IP-PBX/SIP

Trunk

- 6 SIP trunks + 4 PSTN trunks

- 4 SIP trunks if DECT in use

- PSTN interface option (1CO, 2CO, 4CO, 1BRI, 2BRI) (Only one option can be mounted on iPECS SBG-1000 either in the factory or locally).

Extension

- Max 24 extensions
- 23 IP Phones, 6 DECT phones
- 1 FXS port for SLT or FAX

Hardware Interfaces

WAN

- 1-port 10/100/1000BASE-T
- EEE(Energy Efficient Ethernet) ready
- Auto-sensing, Auto-negotiation

LAN

- 8-port 10/100BASE-TX
- Auto-sensing, Auto-negotiation

Power over Ethernet

- Port 1 ~ Port 4
- 802.3af (Total PoE budget : 20 Watts)

Wireless LAN

- IEEE 802.11 b/g/n, 2.4GHz

DECT

- Frequency: 1,880 ~ 1,900Mhz for Europe; 1,920 ~ 1,930Mhz for US

FXS

- Loop distance : 1.5Km with AWG24
- Caller ID (CID) : FSK (ITU-T V.23 or Bell 202) or DTMF (ITU-T Q.23)
- Ring capacity / Frequency : 60Vrms / 25Hz

FXO

- Loop start CO, Caller Identification detection

USB

- Interface mode : USB V1.1, V2.0 Host mode

AC/DC Power Adapter

- 100 ~ 240V AC @50/60Hz , DC48V, 1A

Physical dimensions & Weight

- Width : 278mm, Depth : 233mm, Height : 34mm
- Weight : 0.86Kg

Firewall

- General Security Policy, Access Control
- Web Site Restriction, Port Forwarding, Port Triggering
- NAT/NAPT, DMZ Host, Rule-based Packet Filtering
- Connection Information, Security Log

Security

- Virtual Private Network (IPSec, PPTP, L2TP)
- Remote Administration Access Control
- Digital Certificate Management

Quality of Service

- General QoS Profile, Bandwidth Restriction
- Rule-based Traffic Priority & Traffic Shaping
- DSCP / 802.1p / Priority Queue Configuration
- Connection Utilization & Statistics

Routing

- Static Routing (Routing Table Management)
- Dynamic Routing (RIP v1/v2)
- NAT/NAPT, IGMP/Multicast

L2 Switching

- 8-port 10/100 BASE-TX with 4 built-in PoE (Total PoE Budget : 20 Watts)
- STP/RSTP, VLAN, LAN Bridge
- Broadcast & Multicast Storm Control, Loop Detect

Wireless LAN

- 802.11 b/g/n (2.4 GHz)
- WEP, WPA, WPA2, WPA /WPA2 & Web Authentication
- 802.1x for Enterprise
- Multiple SSIDs (Virtual APs), MAC Filtering
- WPS (WiFi Protected Set-up) support
- Wireless Multimedia (WMM)
- Channel Width & Frequency Selection

IP-PBX / SIP

- LG-Ericsson advanced IP-PBX features- Call Transfer, Call Forward, Call Park, Call Pick-Up, Call Waiting, Camp-On, CO Queuing, Speed Dial, Station Groups, Mobile Extension, 3-Party Voice Conference, IP Fax Relay (T.38)

- SIP Trunk - 4 trunks with DECT, 6 trunks w/o DECT

- CO trunk - Only one option can be mounted on iPECS SBG-1000 either in the factory or locally (1CO, 2CO, 4CO, 1BRI or 2BRI).

- Extension- 23 IP extensions- 6 LG-Ericsson proprietary DECT terminals

- Built-in SIP Proxy, Registrar, User Agent, Failover to PSTN

Administration

- Web-based administration (HTTP/HTTPS)
- CLI (Telnet & Telnet over SSH)
- User management (role & permissions)
- Date & Time (NTP/TOD with daylight saving option)
- Smart Installation Wizard

Services

- File Server (disk management, backup & restore)
- Printer Server (LPD, IPP, Microsoft Shared Printing support)
- DHCP/DNS Server, Dynamic DNS, UPnP

DECT

- Built-in DECT Base Station
- 4 Simultaneous calls with 6 registered

DECT terminals

- LG-Ericsson feature-rich DECT phones

IP Softphone (Phontage, Webphone)

- High Voice Quality GIPS Engine, Multi-Codec (G.711/G.729)
- IP Bridge, Outlook Scheduler Sync, DB Import/Export, Phone Book/Call Log management, Video Conferencing, Instant Messaging, LDAP Search, Audio Tuning Wizard

IP Endpoints

- Full feature system IP phones from Entry to Executive
- IP Softphones and SIP client for Smart phones
- Standard SIP phones (Need IOT)

Auto Attendant / Voice Mail

- Well-organized & Easy to set-up Auto attendant & Voice Mail
- 4 simultaneous channels / 240-minute built-in storage (Expandable upto 480 minutes with a license key)
- On demand call recording, Voice Mail back-up & management

IP Call Recording

- Voice packet encryption & call recording
- Agent Monitoring / Remote maintenance & automatic alarming
- Web based GUI, Statistics, User base access level management

Management

- Device Information & Map View, SNMP, TR-069
- Network Connection Management, Monitoring & Diagnostics
- E-Mail Notification & Syslog Support, System Log
- S?n xu?t t?i Thái Lan.
- B?o hành: 12 tháng.

Ghi chú: Giá ?ã bao g?m Card 4 trung k? CO.

Reviews

There are yet no reviews for this product.